

BenQ

Enjoyment Matters

BenQ

DLP™
A TEXAS INSTRUMENTS TECHNOLOGY




Digital Projector

MX761

HIGHLIGHTS

- 4200 ANSI Lumens
- XGA Native Resolution
- Low Total Cost of Ownership
- Lens Shift
- 1.6x Zoom Ratio
- VIDI™ & BrilliantColor™
- Microphone Mini Jack
- Built-in 10W Speaker x 2
- USB Reader
- USB Display (Plug-n-Play)
- LAN Display
- 4-1 Display
- Crestron RoomView Compatible
- PJ-Link Compatible
- Remote Desktop
- Wireless Display (Optional)
- 3D Color Management
- Auto Keystone (Vertical)
- Keystone ± 40 Degree
- 6 Segment Color Wheel
- Variable Audio Out
- Closed Captioning

Projection System	DLP® technology by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Brightness	4200 ANSI lumens	
Contrast Ratio	5300:1 (Full on/Full off)	
Keystone	Auto Keystone Vertical ± 40 Degree; Manual Vertical ± 40 Degree	
Aspect Ratio	4:3 Native (5 aspect ratio selectable)	
Color	Full 1.07 billion color palette	
Lens	F=2.45~3.07 Lens Shift Vertical 110~130%	
Zoom Ratio	Manual Zoom, 1.6:1	
Image Size (Diagonal)	18" to 300"	
Throw Ratio	1.4 to 2.24 (70"@2M)	
Lamp	300W, 2000/3000 hours (Normal/Economic mode)	
Computer Compatibility	VGA(640 x 480) to UXGA (1600 x 1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-99 kHz	
Vertical Scan Rate	48-120 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2 LAN Networking: RJ-45 x 1 (LAN Display) USB Type A x 1 (USB Reader), Type Mini-B x 1 (USB Display)
	A/V	HDMI (v1.3) x 1 S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1 Component Video: D-sub 15 pin x 2 (Shared with Analog RGB) Microphone: Stereo Mini Jack x1 Audio L/R : RCA x 2 Stereo Mini Jack x 1
Output Terminals	PC	Monitor out: D-sub 15 pin x 1; 12V Trigger
	Audio	Variable Audio Out : Stereo Mini Jack x 1 Speaker: 10W x 2
Control Terminal	Serial Connector : RS232 9 pin x 1	
	RJ45 x 1 (LAN Control) USB Type Mini-B x 1 (Page up/down)	
Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm)	
Weight	7.26 lbs (3.3 kg)	
Power Supply	AC 100 to 240 V, 50/60 Hz	
Power Consumption	Typical 419W, Standby < 1W	
Audible Noise	38/33 dB (Normal/Economic mode)	
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Indonesian/ Italian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)	
Picture Modes	Dynamic Mode	Cinema Mode
	Presentation Mode	User 1 Mode
Functions	sRGB Mode	User 2 Mode
	BrilliantColor™	Blank
	VIDI™	Panel Key Lock
	3D Color Management	Auto Off
	Crestron LAN Control	Security Password
	Closed Captioning	HDTV compatible
	Digital Zoom (x2)	High Altitude Mode
	Variable Audio Out	"Q?" Hot Key for FAQ
	Quick Cooling	3D Ready
	Quick Auto Search	Freeze
Accessories (Standard)	PJLink Compatible	
	Quick Start Guide	VGA(D-sub) cable
	Manual CD	Power Cord
Accessories (Optional)	Remote Control w/battery	Soft Carry Case
	Ceiling Mount (P/N: 5J.J2K01.001)	Spare Lamp Kit (P/N:5J.J3J05.001)
	Wireless Dongle (P/N:5J.J0614.021)	

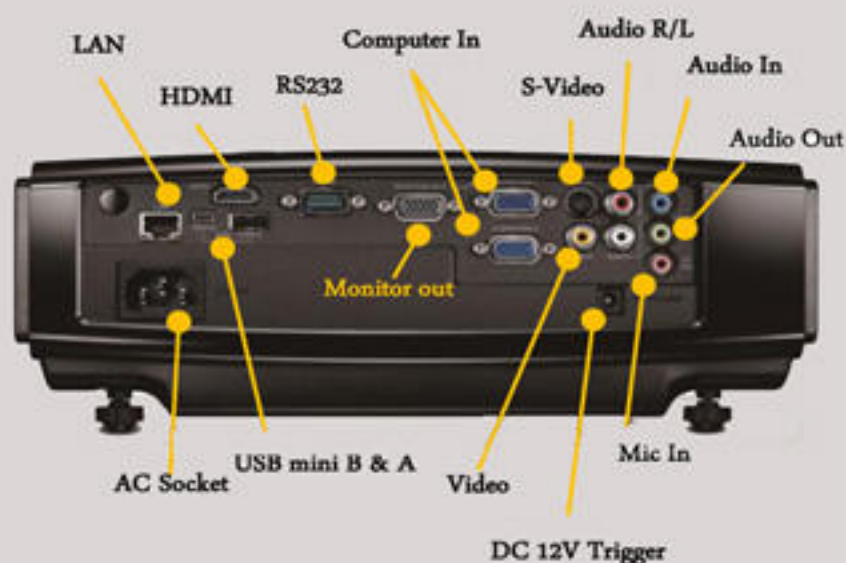

Authorized Distributor & Service Centre

SARKARS INTERNATIONAL

206/207, 2nd Floor, Shaheen Centre, DC-5,
Scheme No. 5, Block-7, Clifton, Karachi.

Tel: 35833955, 35821549, 35832510 Fax: 35872442

E-mail: sarkar@cyber.net.pk / Info@sarkarsinternational.com

Web: www.sarkarsinternational.com

